

GENERAL DESCRIPTION:

Cast brass body. All metal handle. Washerless 28 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Brass push pop-up drain. body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be mounted on 4" centers using optional escutcheon (7353.101P) or single hole mounting method.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Brass Push Pop-up Drain:

- Brass push pop-up drain.
- Fewer parts. Installs in less time.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.


SUGGESTED SPECIFICATION


Single control lavatory faucet shall feature a cast brass body with metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall feature a brass push pop-up drain. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7353.101. _ _ _ _.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9**
- NSF 372**
- ANSI A117.1**

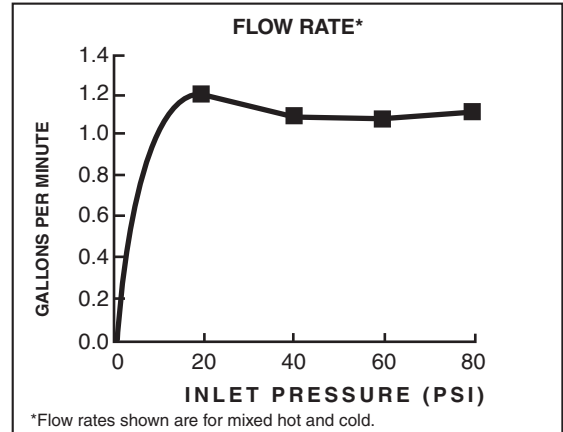

Product Number	Description	Finish Options			
		Polished Chrome	PVD Polished Nickel	Legacy Bronze	PVD Brushed Nickel
		002	013	278	295
7353.101	Townsend Single Control Monoblock. Brass push pop-up drain. 				
7353.101P	Optional Escutcheon Plate Only (For mounting on 4" centers)				

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.