


LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL# FUL-913-BK


The fixture can be mounted both downwards and upwards FRONT VIEW 1 23,1/4" Includes the metal frame. Glass shade is 6"



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 3- Medium Base Buib 60 Watts Recommended 100 Watts Max. USE LED BULBS FOR EXTENDED USE THE FIXTURE IS DAMP RATED

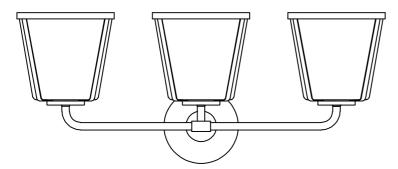

How to install

- Install the mounting plate to the outlet box using two outlet box screws.
- 2. Install backplate onto the mounting plate, and secure with the screws.
- 3. Install the Glass shade onto the socket and secure with socket ring.
- 4. Install the bulb(not included) into the socket.

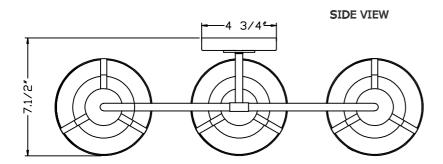



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL# FUL-913-BK

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate W4-3/4"xH3/4"(XSU911BKBKP4.75IN)
- D. (2)-Screw
- E. (3)-Socket ring 2-1/4" (XSU911RING)
- F. (3)-Glass shade 6" (XSU911SHA6IN)

