

# Assembly Instruction Sheet #S-1125C24-9


## For Style 1125C24-9

**Tools Required:** Flathead screwdriver, Philips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (9) SUGGESTED LED G8 BULB MAX 7W (Not Include).  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents

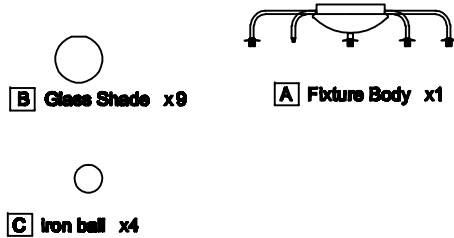

### Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Screw	2pcs



### STEP 2 - Attach Crossbar to Outlet Box.

A. Pass the supply wires through the Crossbar (EE). Attach the Crossbar (EE) to the Outlet Box (CC) with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.




Figure 2

### STEP 3 - Fit Ceiling Canopy to Crossbar Assembly.

A. Fit the ceiling canopy to mounting screws (DD) and secure with screw (AA). Note: The ceiling canopy should be snug against the ceiling and the screw (AA). If not, adjust the length of the mounting screws (DD) by unscrewing the hex nut and lock washer and then screwing mounting screws (DD) in or out of the crossbar (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the screw (AA) and ceiling canopy and proceed to step 4.




Figure 3

### STEP 4 - Wire Connections.

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

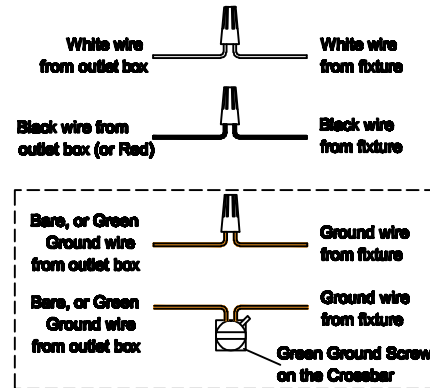


Figure 4

### STEP 5 - Install Ceiling Canopy to Ceiling.

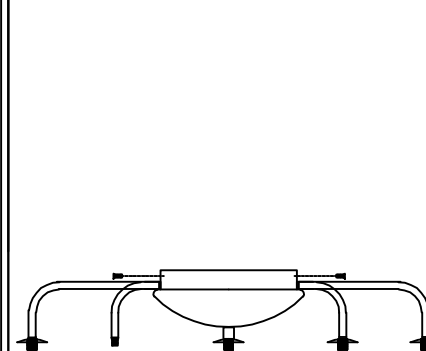


Figure 5

### STEP 6 - Install Glass Shade and bulb.

A. Install bulbs into sockets and screw snugly into place. □  
 B. Please put the Glass Shade to the Fixture Body (A).

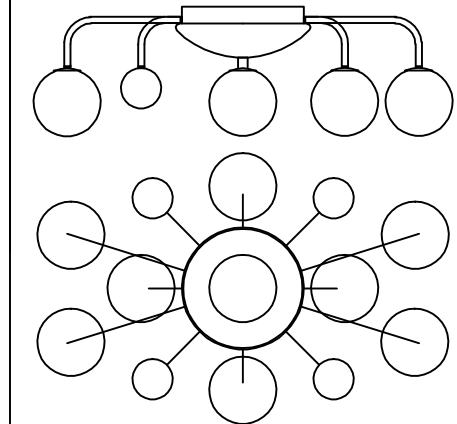
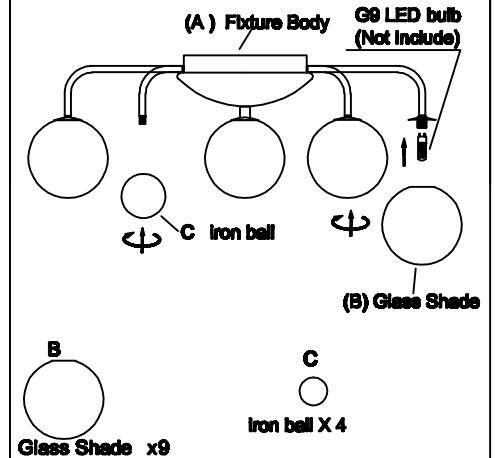


Figure 6