

## Florestone Saflor® Recess Shower Receptors

### Architect's Specifications

Furnish and install Saflor® Shower Receptor manufactured by Florestone Products Co. (Model Number - see table.) The receptor shall be furnished with slip-resistant design that does not interfere with the flow of water nor trap it. Receptor to have integral molded drain (Note: 3634-1 not available with integral drain or as a Corner Model). Receptor to have not less than 1" flange on remaining sides. Receptor to be stain, and fungus resistant. Color to be off-white (unless other specified) and will be resistant to fading and abrasion.


Model shall conform to ANSI-Z124.1.2-2005

### SAFLOR® Options and Accessories

Biscuit, Bone	Strainer, Chrome
Josam Jiffy-Joint™	Strainer, Plastic
Wedge-Lok® Seal	Repair Kit
Strainer, Brass	



One piece, single threshold model for recessed installation. Features 1" flange on three remaining sides. Integral drain with Wedge-Lok® Seal.

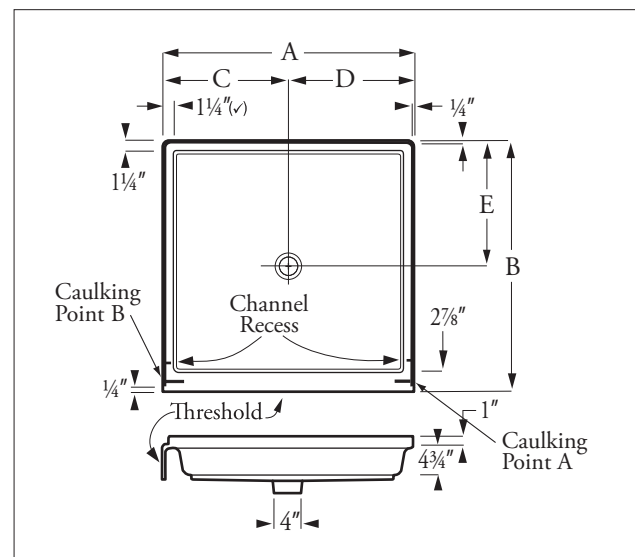

Model	A	B	C	D	E	WT.
3232-1*	32"	32"	16"	16"	16"	40
3434-1	34"	34"	17"	17"	17"	42
3634-1**	35 1/2"	33 1/2"	17 1/2"	17 3/4"	16"	56
5434-1	54"	34"	27"	27"	17"	76
6032-1	60"	32"	30"	30"	16"	76

\* Does not meet I.A.P.M.O. minimum size requirements. Check local codes.

\*\* Integral drain not available with this model (3634-1). Supplied with 101 PNC non-caulk drain.

**Dimensions subject to  
change without notice**

**Contact Florestone Products to  
verify product specifications.**



### FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com

#### Standards:

I.A.P.M.O. International Association of Plumbing and Mechanical Officials  
File No. 0687.

ANSI American National Standards Institute - Specifications Z-124.2.

HUD/FHA National Specifications UN-73.

