

# GE40S08BAM

## GE® 40 Gallon Electric Water Heater

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

#### LOCAL INSTALLATION REGULATIONS:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Preventions Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70.



**INSTALLATION INFORMATION:** For complete information, see installation instruction packed with your water heater.

**POWER REQUIREMENTS:** Check the markings on the rating plate of the water heater to be certain the power supply corresponds to the water heater requirements.

**LOCATION:** Locate the water heater in a clean dry area as near as practical to the area of the greatest heated water demand. Long uninsulated hot water lines can waste energy and water.

**REQUIRED CLEARANCES:** There must be sufficient clearance between any object and the top, rear and sides of the water heater in the event service is needed. The controls and drain at front of unit must have clear access for operation and service. Installations that require minimal clearance on the sides or rear of the water heater for earthquake straps are also acceptable. In these cases, additional clearance should be provided on the opposite side of the unit to allow for service access

#### TYPICAL TOP CONNECT INSTALLATION

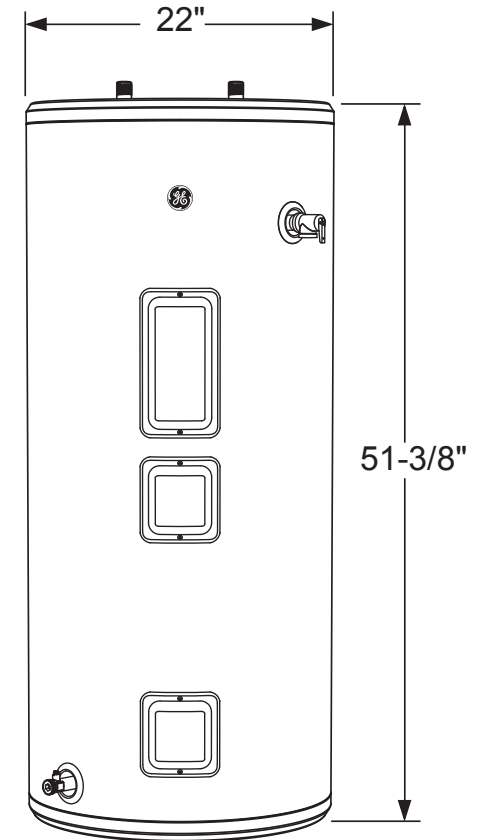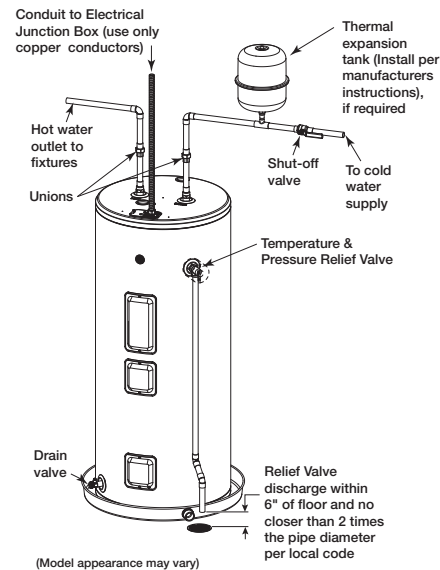

Above illustration intended for dimensional reference only. Refer to photograph for actual product appearance



For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Certified to NSF/ANSI 372

See [http://info.nsf.org/Certified/Lead\\_Content/](http://info.nsf.org/Certified/Lead_Content/) for specific model listing



Listed by Underwriters Laboratories

Specification Created 9/19

# GE40S08BAM

## GE® 40 Gallon Electric Water Heater

### FEATURES AND BENEFITS

Thermostat controlled

**Real Capacity** – Tank capacity holds a true 40 gallons of water

**First Hour Rating Performance** – Provides 66 gallons of heated water in the first-hour delivery

**Quick Water Recovery** – Quicker recovery with two copper 5500-watt heating elements

Anode Rod – Durable design protects the water heater from corrosion

Plastic Drain Valve – Allows for easy draining of the tank

3/4" MNPT Hot and Cold ports

**Warranty** – 1-year limited labor\* / 8-year limited parts\*

Model GE40S08BAM - Diamond Grey

\*See written warranty for full details

