
<u>UL SPECIFICATION</u>

- * FIXTURE SHALL BE LISTED FOR LOCATION ONLY AND LABELED AS SUCH.
- * FIXTURE MUST BE MANUFACTURED IN ACCORDANCE WITH UL STANDARD 1598.

PARTS SPECIFICATIONS ITEM OTY DESCRIPTION

- SOCKET- UL LISTED/CSA CERTIFIED BASE= MEDIUM SOCKET= PORCELIN SEE LEAD WIRE FOR SOCKET WIRE SPEC.
- LEAD WIRE- 120"[300] FROM FRAME TOP В (1) UL LISTED/CSA CERTIFIED, AWG #18 105°C BLACK AND WHITE WIRE. STRIP 1/2 [12.7], SPLIT 3 [76.2]. FROM TOP OF SCROLL. (SEE CHART FOR COLOR).
- GROUND WIRE-120"[300] FROM FRAME TOP 1/4 LAY COPPER GROUND WIRE. (1) FROM TOP OF SCROLL. (SEE CHART FOR TINT).

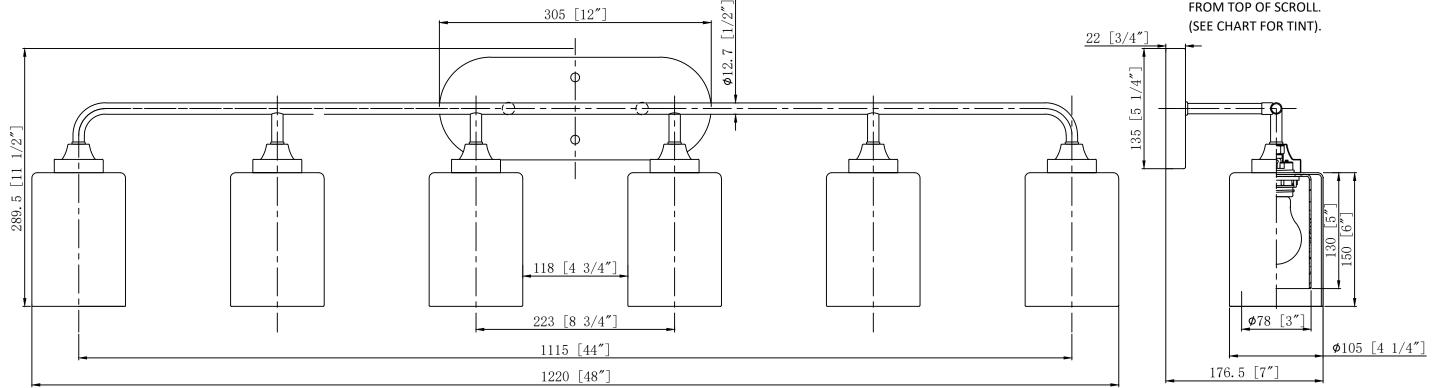

INNOVATIONS LIGHTING

DESIGN COPYRIGHT - 28/09/2020 ALL RIGHTS RESERVED AND MAY NOT BE DUPLICATED WITHOUT OUR WRITTEN PERMISSION



							LIALLA MESEL: ENORMICHMAN DE JOH	
RAWN IN IRD ANGLE ROJECTION	"mm" DIMENSION INDICATED IN [] DIMENSION IN [] IS FOR REF. ONLY					TITLE		_
	TOLERANCES (EXCEPT AS NOTED) DECIMAL ANGULAR FRACTIONAL SCALE					6LT WALL MOUNT		
	NONE ±.031 .X ±.015 .XX ±.010 .XXX ±.005	± 1/2°	± 1/32	CHECKED BY	1:6	PART NO.	WALL	REV.
		DATE 28/09/2020	Diowine	X	X	ITEM NO.	DL190307-6WL-B	REV.A