

Features

- Acts as an auxiliary control for DTV Mode® or DTV Prompt® two-outlet digital showering system.
- Provides simple on/off actuation of shower outlets.
- Sleek, minimalist design.

Installation

- Wall-mount.
- Intended for outside of showering space.

Required Products/Accessories

K-527 digital shower interface, portrait setting
K-528-PM Two-port digital thermostatic valve

or

K-29200 Wall-mount bath filler digital interface
K-528-PM Two-port digital thermostatic valve

or

K-29201 Wall-mount bath/shower digital interface
K-528-PM Two-port digital thermostatic valve

or

K-29202 Dual-outlet shower digital interface
K-528-PM Two-port digital thermostatic valve

or

K-29204 Deck-mount bath filler digital interface
K-528-PM Two-port digital thermostatic valve

or

K-29205 Deck-mount bath/shower digital interface
K-528-PM Two-port digital thermostatic valve

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:
Mounting hardware



Codes/Standards



UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68


KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BL	Matte Black

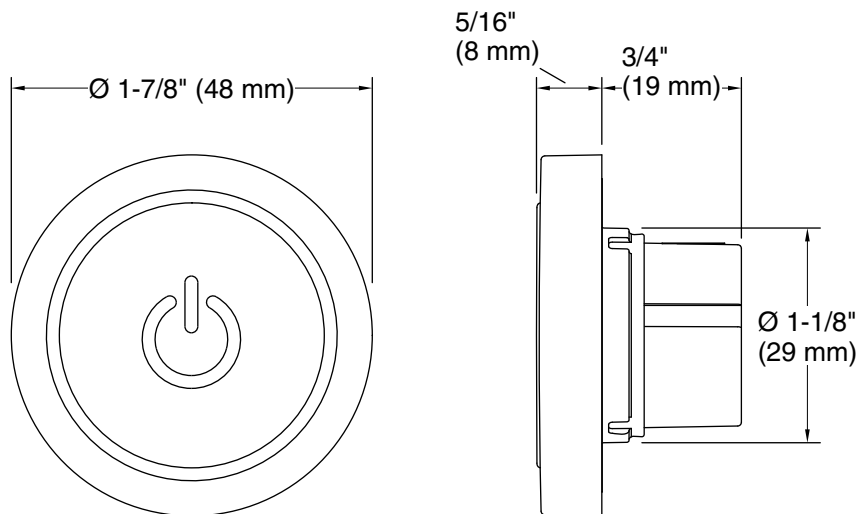

Technical Information

All product dimensions are nominal.

Drain included:	No
Max. Ambient temp:	104°F (40°C)
Min. Operating temp:	86°F (30°C)
Max. Operating temp:	120°F (48.9°C)
Max. Relative humidity condensing:	100%

Notes

Install this product according to the installation instructions.