


# 4120 Series

120-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

## LED 2' Linear Vapor Tight

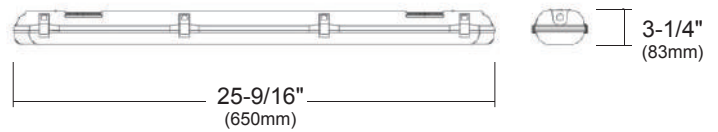

LED Vapor Tight Linear Fixture

### DESCRIPTION

A low-profile, cost effective and energy efficient alternative to fluorescents, this LED Vapor Tight luminaire features a full-length, gasketed polycarbonate lens and single piece non-corrosive (PC) Polycarbonate body. Designed to meet or exceed IP65 ratings against dust and pressurized water jets. Ideal for places where dirt, humidity, dust, and cold temperatures reside.

### DESIGN FEATURES

#### Construction

- Single piece polycarbonate body and gasketed polycarbonate lens
- IP65 rated against ingress of dust and water jets from all directions
- 1/2" conduit access on either end of housing body

#### Electrical

- 120-277V Universal Voltage
- Microwave motion sensor available
- Operating Temperature: -22°F to 122°F
- 50,000 hour projected life
- 0-10V Dimming
- 20W, 2000lms
- 4000K | 80 CRI

#### Installation

- Surface mount with included removable, snap-in mounting brackets
- Suspended installation with included wire support arms.
- Tool-less lens lock system for easy wiring access

#### Lens

- Gasketed UV resistant polycarbonate lens
- Stainless Steel latches included

#### Certifications

- cCSAus Listed for IP65 wet rating
- 5 Year Limited Warranty

ORDERING GUIDE				
Model #	Finish	Wattage	CCT	Sensor Option
4120	WH	-20	-4K	
4120	-WH : White	-20 : 20W	-4K : 4000K	-blank : no sensor -MS : Microwave Sensor

*Example: 4120WH-20-4K-MS*

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



8/18/2020

